

Card Reader

CDR-0130L / S


Product Specifications

1. Features

- 125 KHz outside Card Reader (MS II, SS, BMS, SMBS, FS)
- RS-422 Multi Drop
- Buzzer & Voice announcing
- Volume adjustment
- Equipment number (0~9)
- Case Tamper Event



2. Dimensions

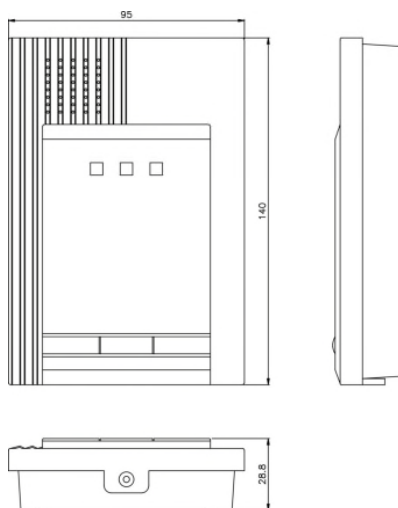

3. Specifications

Model Number	RF Card Standard	Display Type	Operating Voltage	Normal Current		Operating Temperature Range
				DC 12V	DC 30V	
CDR-0130 L	125Khz Temic	LED	DC 9.6V ~ 30V	Less than 100mA	Less than 60mA	-20°C ~60°C
CDR-0130 S						