

Card Reader

CDR-0250S / 0260S


Product Specifications

1. Features

- Graphic LCD Display
- RS-422 Multi Drop
- RS-232C (PDA Communication)
- Voice announcing



2. Dimensions

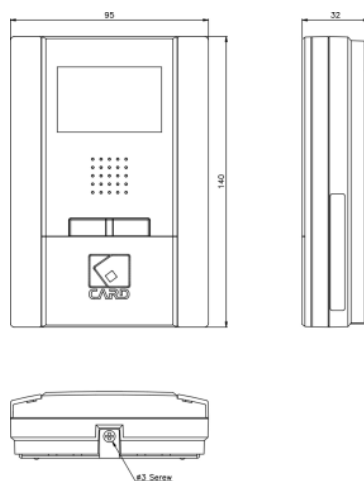

3. Specifications

Model Number	RF Card Standard	Operating Voltage		Normal Current		Button Display	Operating Temperature Range
		FS/AMS/IMS	SBMS	DC 13V	DC 27V		
CDR-0250S (For Residential area)	125 KHz Temic RF	DC 12V (9.5V~13.5V)	DC 24V (19.2V ~28.8V)	Less than 150mA	Less than 80mA	Home/Disarm	-20°C ~60°C
CDR-0260S (For Commercial area)						At SET/Disarm	
CDR-0264S (For Commercial area)	125 KHz Temic 125 KHz EM Read only 125KHz HID						