

Door Announcer

EWP-202C


Product Specifications

1. Features

- Advanced dual-infrared beam and superior wireless technology
- Wireless multi-function receiver
- Dual channel receiver with status LED's
- 20 ft. detection range across doorway
- Independent entry/exit counters
- 200 ft. wireless RF transmission in open field
- 2 selective chime sounds per channel
- Chime volume control
- Resettable 6-digit counter (up to 999999)
- Power failure memory back-up
- Wireless push-button included
- 16 million I.D. codes system



2. Dimensions

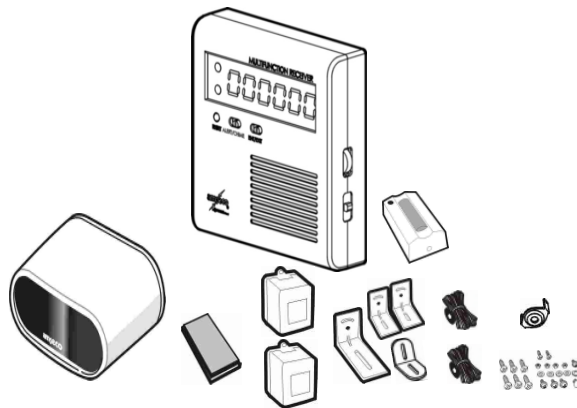

3. Specifications

Model Number	Detection Range	Max. Transmission Range	Response Time	Chime Terminal Output	Terminal (OC)	Terminal (IC)	Blocked Infrared beam Warning
EWP-202C	10ft. JP2=ON 20ft JP2=OFF (f.s.)	200ft. Open Field	4m/sec	Ground(-) 12V DC 1A (+V)	Exit Output (-) TR Output 1A	Entry Output (-) TR Output 1A	JP1 Selective Off/ 10Sec/60ec

The specification is subject to change without any prior notice for the improvement or modifications

. K&J Electronics Inc., Unit301-5F, Bucheon Technopark Ssangyong III,
#36-1 Samjeong-Dong, Ojeong-Gu, Bucheon-Si, Gyeonggi-Do, Korea

Tel: 82-(0)32-624-1200~3 Fax: 82-(0)32-624-1225 e-mail: Sales@knjelectronics.com