

Surface Magnet Contact

AMS-39 Series

Product Specifications

1. Features

- UL and ULC Listed
- 3/4" operating gap
- Spacers and covers included
- Available in white, brown, gray, or ivory
- AMS39CVS: Includes screws, covers and Spacer 5sets/pack






AMS-39A



AMS-39B

2. Dimensions

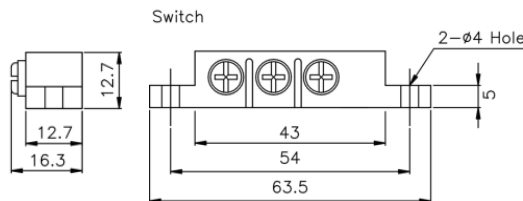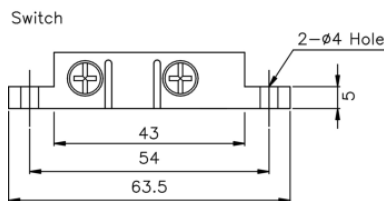

AMS-39A

AMS-39B

3. Specifications

Model Number	Operating Gap	Contact	Contact Type	Max. Switching Current	Max. Carry Current	Breakdown Voltage	Rating	Magnet Type	Mounting	Operating Temperature Range
AMS-39A	3/4"	Terminal	N.O	0.5A	1.0A	200V DC	10VA	Ferrite	Screw	32°F ~ 120°F (0°C ~ 49°C)
AMS-39B			N.O N.C	0.2A	0.5A	200V DC	3VA			
AMS-39CVS			N.O	0.5A						
AMS-39L	1"	N.O	0.3A	1.0A	200V DC	10VA	Alnico-5	Screw/ Self - adhesive		

The specification is subject to change without any prior notice for the improvement or modifications

. K&J Electronics Inc., Unit301-5F, Bucheon Technopark Ssangyong III,
#36-1 Samjeong-Dong, Ojeong-Gu, Bucheon-Si, Gyeonggi-Do, Korea

Tel: 82-(0)32-624-1200~3 Fax: 82-(0)32-624-1225 e-mail: Sales@knjelectronics.com