

# High Security Contact

## BMC-33B / 31B


## Product Specifications

### 1. Features

- 1 3/8" to 3" operating gap
- 24" armored cable
- Corrosion resistant
- Alnico 6 magnet
- Anodized aluminum housing



### 2. Dimensions

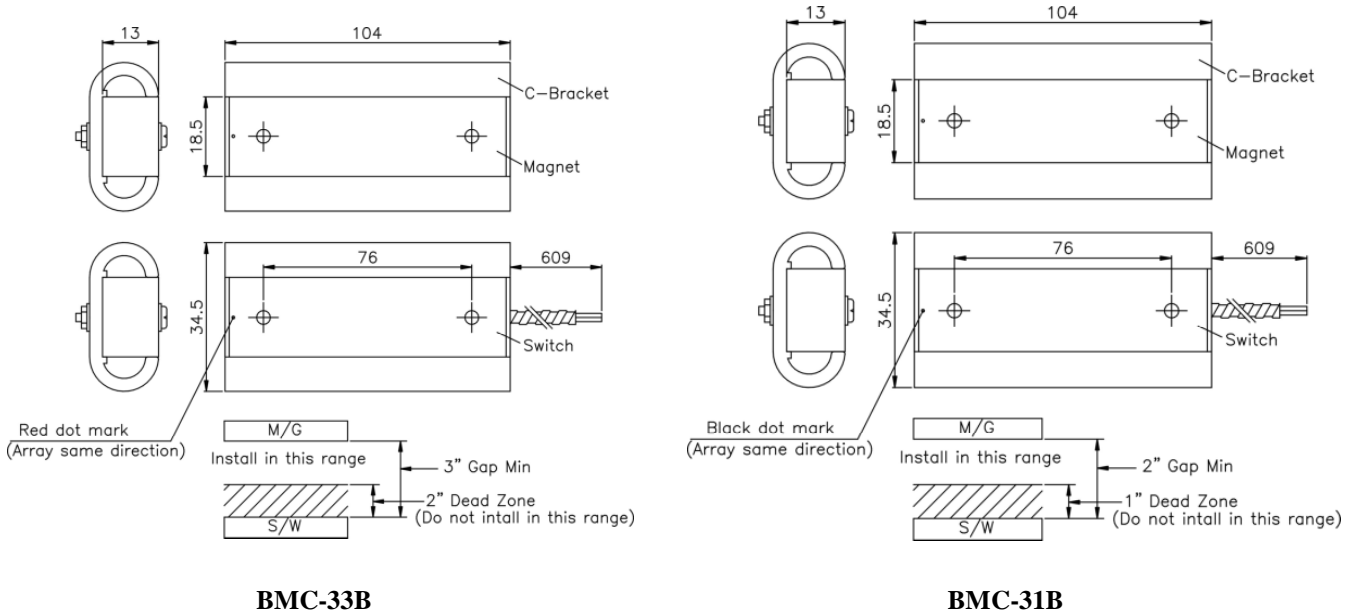

### 3. Specifications

Model Number	Operating Gap	Contact Type	Max. Switching Current	Max. Carry Current	Breakdown Voltage	Rating	Magnet Type	Mounting Method	Operating Temperature Range
BMC-33B	1 3/8" to 3"	N.O N.C	0.2A	0.5A	200V DC	3VA	Alnico 5	Screws	32°F ~ 120°F (0°C ~ 49°C)
BMC-31B	1" to 2"						Alnico 6		

The specification is subject to change without any prior notice for the improvement or modifications