

Hold-up Switches

HUS-6 / 6A


Product Specifications

1. Features

- ABS housing
- DPDT Transfer Contacts for supervised Loop
- 2-Individual (N.C-N.O-Common) Circuits
- UL Approved Micro Switch
- Push Orange Button or Pull Wire
- Reset: Push in 2mm dia. Key tool
- Color: Housing-Ivory, Gray
Button: Orange



2. Dimensions

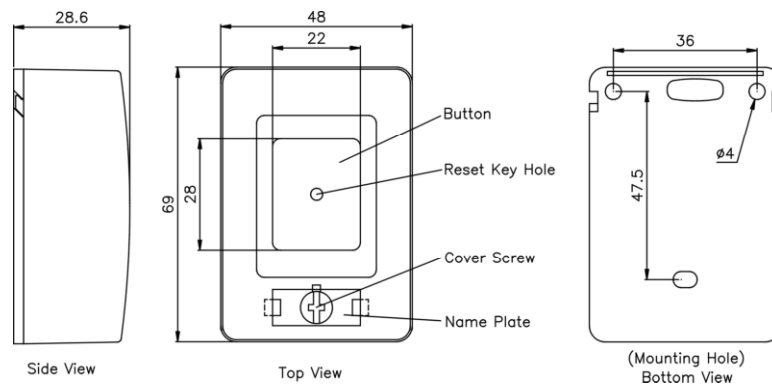

3. Specifications

Model	Contact Type	Contact Rating			Overall Stroke	Overall Force	Operating Method
		125V AC	30V DC	125V DC			
HUS-6	Form C	5 Amp	5 Amp	0.4 Amp	7 mm	300g~350g	Orange Button or Pull wire
HUS-6A	N.O/N.C						

- * Cover Mounting Screw is hidden under Name Plate
- * When Switch Assembly forced break, Micro S/W turn on Alarm condition