

# Dual Button Hold-up Switches

## HUSD-15BL/BM

## Product Specifications

### 1. Features


- Dual-button activation to eliminate accidental triggering
- SPDT transfer contact for supervised loop
- Terminal strip with 3 wire terminals
- Tamper protected switch mechanism using UL listed micro switch
- Concealed mounting screw
- Status window indicator
- HUSD-15BL: latching button - tool reset (included)
- HUSD-15BM: momentary button – auto-reset
- Plastic case housing, color: white



HUSD-15BL

HUSD-15BM

### 2. Dimensions

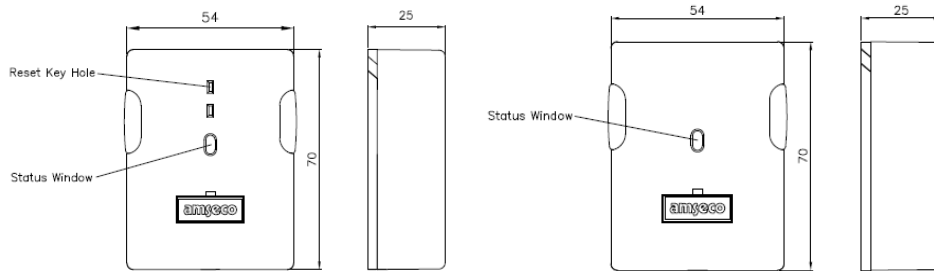

HUSD-15BL

HUSD-15BM

### 3. Specifications

Model	Mechanism Type	Contact Type	Contact Rating			Overall Stroke	Overall Force	Operating Method
			125 V AC	30V DC	125 V DC			
HUSD-15BL	Latching	SPDT N.O/N.C	6Amp	5 Amp	0.4 Amp	3 mm	300g ~ 400g	Dual-button
HUSD-15BM	Momentary							

\* N.C. contacts are closed with magnet engaged.  
 \* N.O. contacts are open with magnet engaged

The specification is subject to change without any prior notice for the improvement or modifications